

VIN: XXXXXXX Vehicle: MINI/F56/HAT/Cooper/B38/AUTO/USA/LL/2014/11
System Version: 3.47.10.13054 Data Version: R3.47.10.13054

51 16 165 Removing and installing/replacing complete centre console



Necessary preliminary tasks:

- Remove left and right [side centre console trim panel](#)
- Remove [rear cup holder](#)
- Remove [driving experience switch](#)
- Release gaiter for parking brake lever from centre console and remove

Only for version with centre armrest:


- Remove [centre armrest](#)

With controller version only:

- Remove [controller](#)



REMOVAL:

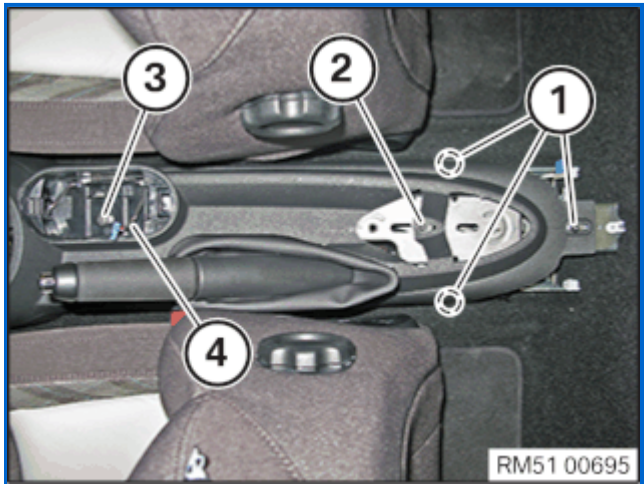

Release screws (1).



Additionally for version with centre armrest:

Release screw (2).

Additionally for version with controller:

Release screw (3) and feed out connector (4).

Release left and right screws (1).

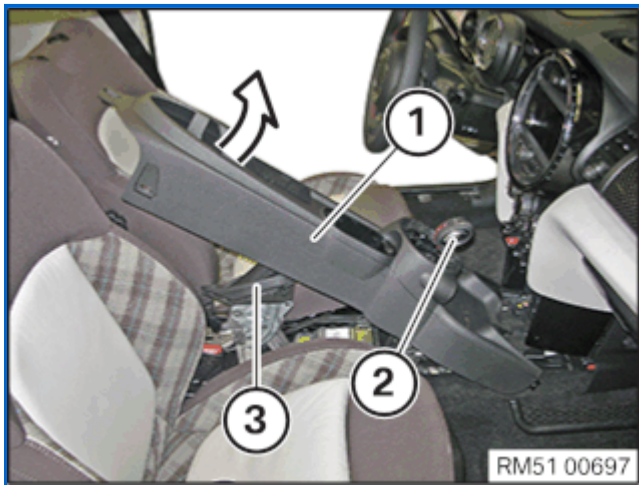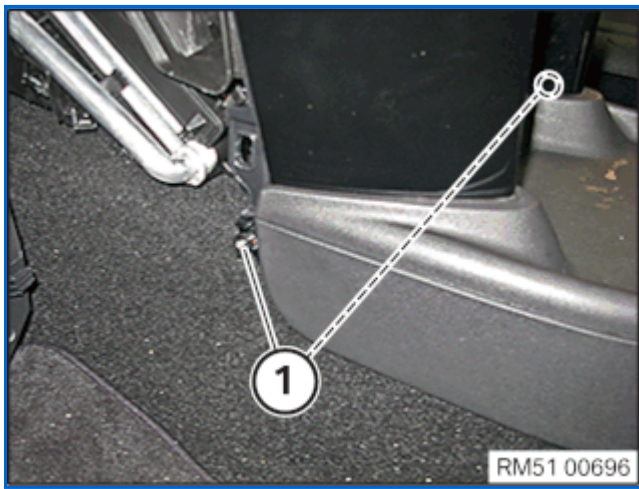


Raise centre console (1) at the rear and feed out selector lever or gearshift lever (2) and gaiter (3).

Remove centre console (1) to the rear/top.




INSTALLATION:

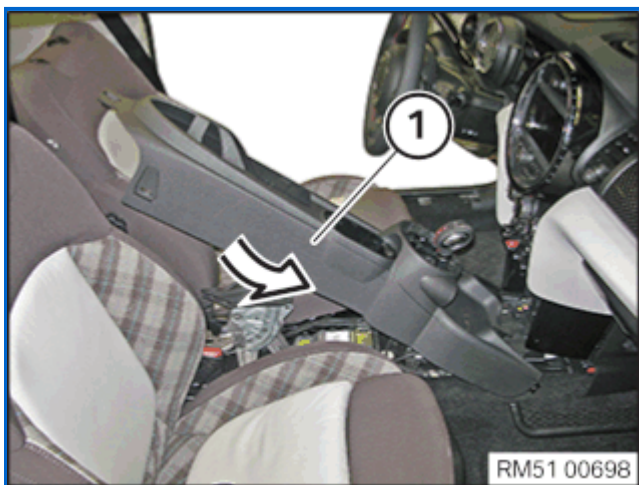

Feed in centre console (1).

Tighten screws (1) on left and right.

Tightening torque [51 16 1AZ](#).

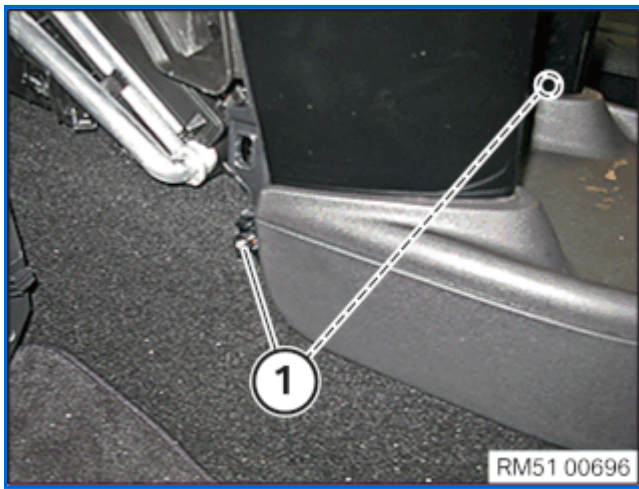

Tighten down screws (1).

Tightening torque [51 16 6AZ](#).

Additionally for version with centre armrest:


Tighten screw (2).

Tightening torque [51 16 6AZ](#).

Additionally for version with controller:

Tighten screw (3) and feed in connector (4).

Tightening torque [51 16 6AZ](#).

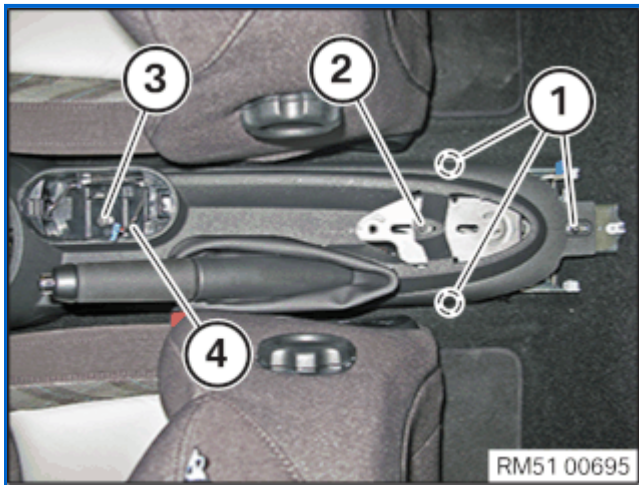

Required reworking:

- Install left and right [side centre console trim panel](#)
- Install [rear cup holder](#)
- Install [driving experience switch](#)
- Install gaiter for parking brake lever
- Only for version with centre armrest:
- Install [centre armrest](#)
- With controller version only:
- Install [controller](#)