

REP-REP-RAF5651-5143201 Removing and installing or replacing trim for roof pillar at front (A-pillar), left or right

VIN: XXXXXXXX Vehicle: MINI/F56/HAT/Cooper/B38/AUTO/USA/LL/2014/11  
System Version: 3.47.10.13054 Data Version: R3.47.10.13054

51 43 201 Removing and installing or replacing trim for roof pillar at front (A-pillar), left or right




**Warning!**  
Vehicles with head airbags:  
Read and comply with [safety regulations](#) for working on vehicles with airbag systems.

**Important!**  
Do not use any sharp-edged tools to remove the trim panels (risk of damage to head airbag).



**REMOVAL:**

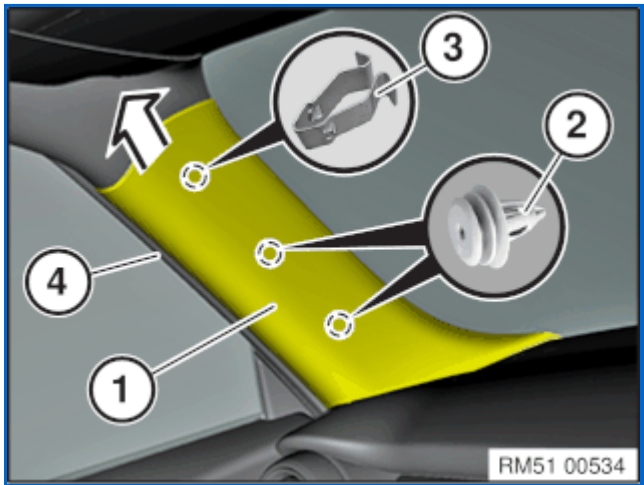


Release trim panel (1) from clips (2) and release upwards out of clamp (3).  
Unlock and disconnect associated plug connections, according to the equipment.



**Replacement (depending on equipment):**  
Remount [tweeter](#).




## INSTALLATION:

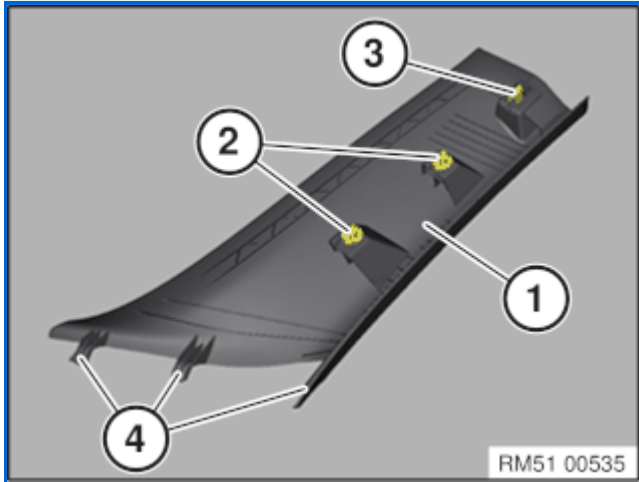

Preassemble clips (2) and clamp (3) on trim panel (1).

Guides (4) must not be damaged, replace trim panel (1) if required.

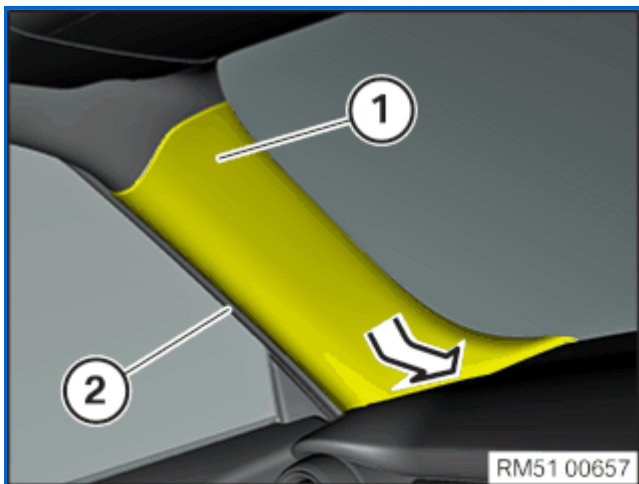

Feed in and engage trim panel (1).

Ensure correct fit on edge protection (2).