

Note:


Front center console and cover trims for front center console on instrument panel must be simultaneously removed and installed.

Remove shift lever knob.

Remove dust guard.

To remove the ashtray (1) (depending on equipment specification), open the ashtray lid and lift out the ashtray housing.


Remove screws (2) in drinks holders.

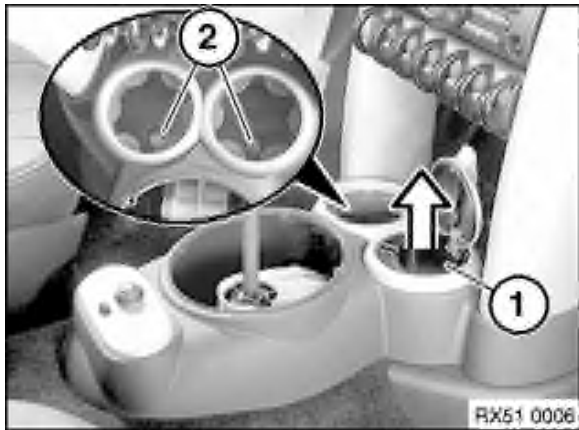


Snap switch cluster out of center console.

Detach plug connector (1) from switch cluster.


Release screws (2) at back end of console.

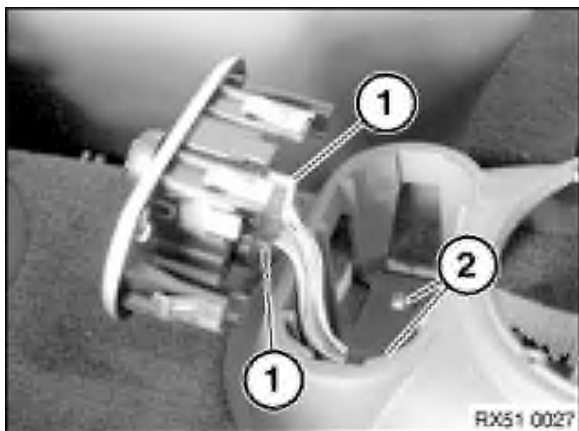

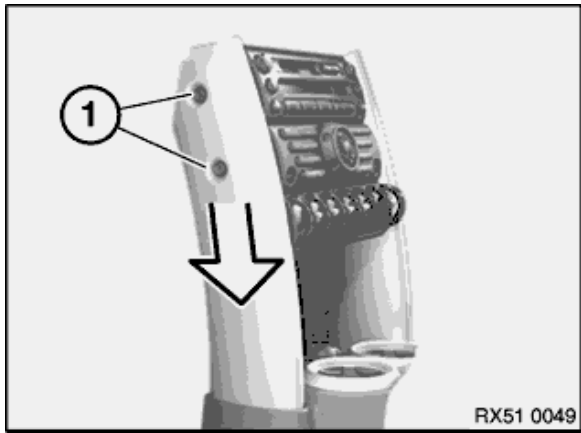

Release screws (1) securing both cover trims of the center console to the instrument panel.

Tightening torque, 51 16 2AZ .

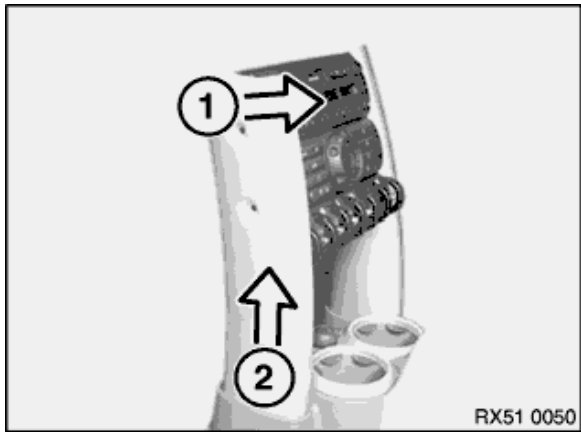

Detach front center console to facilitate removal of console and cover trim for instrument panel.

Detach cover trims in direction (1) from instrument panel.

Detach cover trims in direction (2) from center console.

Disconnect plug connector for socket/cigarette lighter.

Remove console.

Installation:

Make sure foam blocks are correctly seated between center console and cover trims.




Important!

Make sure that cables are not trapped when installing the center console.

Remove front centre console finishers.

Refer to Removing/installing or replacing front centre console to fascia finisher.

Remove screws (1) and pull radio forwards.

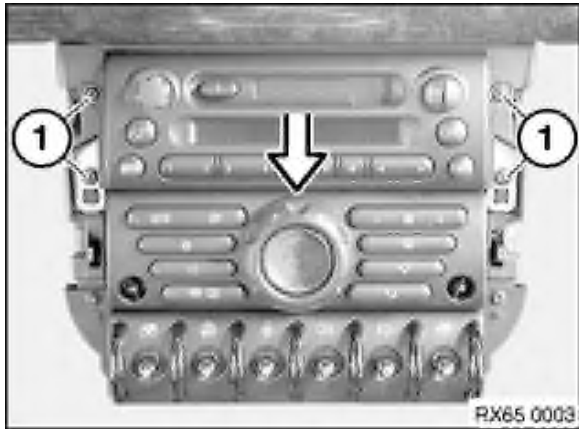

Remove radio harness retaining plug (1).

Remove radio harness connector (2).

Remove antenna connector (3).

